

LED-2-Link Spot















Description:

rotate and swivel LED Spot, combinable, metal housing, light appearance neutral white approx. 4000K, feed-through wiring with LED 24 plug + LED 24 connector, optional accessories: various recessed and surface-mounted profiles as well as combinable with different kinds of luminaires, Dim-Controller with remote control, 1-10V, DALI, ZigBee, Sonar or WiFi

Connection: LED-Trafo DC 24 V
Life: L90/B10 >= 60.000 h
Light colour: 4000 K neutral white

Beam angle: 38°

Energy efficiency: LED 110 lm/W; luminaire: 80 lm (53 lm/W)

Colour rendering: Ra/CRI >= 90

 Symbols:
 CE, MM, UL, IP20, SK III


 EAN-No.:
 4051268165624

 Weight:
 0,114 kg

Special features:

- 300° rotatable and swivelable by 300°
- max. 48 W per supply cable

Ø 290	ww 424 lx	nw 520 lx
290	424 lx	520 lx
580	106 lx	130 lx
870	47 lx	58 lx
1160	27 lx	33 lx
1450	17 lx	21 lx
	1160	1160 27 lx

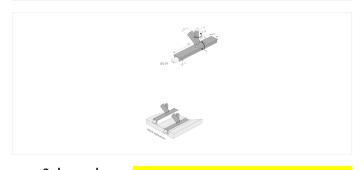

Order number: 61002133103

limited availability

available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61002130302	LED 2 Link Spot 1x 1,5W ww black	black	3000 K warm white
61002130102	LED 2 Link Spot 1x 1,5W ww anodized aluminium	anodized aluminium	3000 K warm white
61002130303	LED 2 Link Spot 1x 1,5W nw black	black	4000 K neutral white
61002130103	LED 2 Link Spot 1x 1,5W nw anodized aluminium	anodized aluminium	4000 K neutral white
61002133302	LED 2 Link Spot 3x 1,5W ww black	black	3000 K warm white
61002133102	LED 2 Link Spot 3x 1,5W ww anodized aluminium	anodized aluminium	3000 K warm white
61002133303	LED 2 Link Spot 3x 1,5W nw black	black	4000 K neutral white
61002133103	LED 2 Link Spot 3x 1,5W nw anodized aluminium	anodized aluminium	4000 K neutral white



Order number: 61002133103

