

Basic Side-Tape



Self-adhesive, 90° lateral radiation LED Basic Side-Tape 5m 600 LED 40W ww



Description:

Flexible LED tape on roll, colour appearance warm white approx. 3000 K with lateral radiation, quick and easy installation due to the already applied double-sided 3M adhesive tape, supply cable easy to attach, the tape can be shortened every 50 mm (marks between the LEDs). Afterwards the tape can be reconnected without soldering with the connecting clip or the cables, accessories available: dim-controller with remote control, 1-10V, DALI, ZigBee, Sonar or WiFi control


Connection: LED-Trafo DC 24 V
Life: L70/B10 >= 50.000 h
Light colour: 3000 K warm white
Beam angle: 95°
Energy efficiency: LED 114 lm/W; luminaire: 690 lm/m (86 lm/W)
Colour rendering: Ra/CRI >= 90
Symbols: CE, MM, IP20, SK III
EAN-No.: 4051268169134
Weight: 0,08 kg

Special features:

- illuminated direction 90° turned
- max. 6 m on one supply cable
- quick and easy installation due to double-sided adhesive tape
- tapes can be shortened at 50 mm intervals according to the marks on the front side
- afterwards the tapes can be reconnected without soldering with the connecting clips or cables

Basic Side-Tape

	95°	Ø	ww	nw
0,5m		535	1516 lx	1532 lx
1,0m		1070	379 lx	383 lx
1,5m		1605	168 lx	170 lx
2,0m		2140	95 lx	96 lx
2,5m		2675	61 lx	61 lx

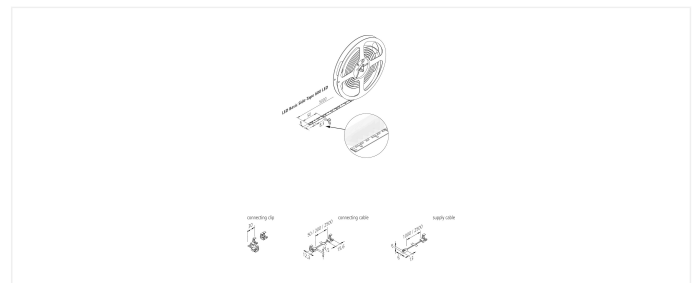


Order number:
20202800202

article in stock


available versions

Choose from the options below. The currently selected one is highlighted in color.


article number	description	light colour
20202800202	LED Basic Side-Tape 5m 600 LED 40W ww	3000 K warm white
20202800203	LED Basic Side-Tape 5m 600 LED 40W nw	4000 K neutral white

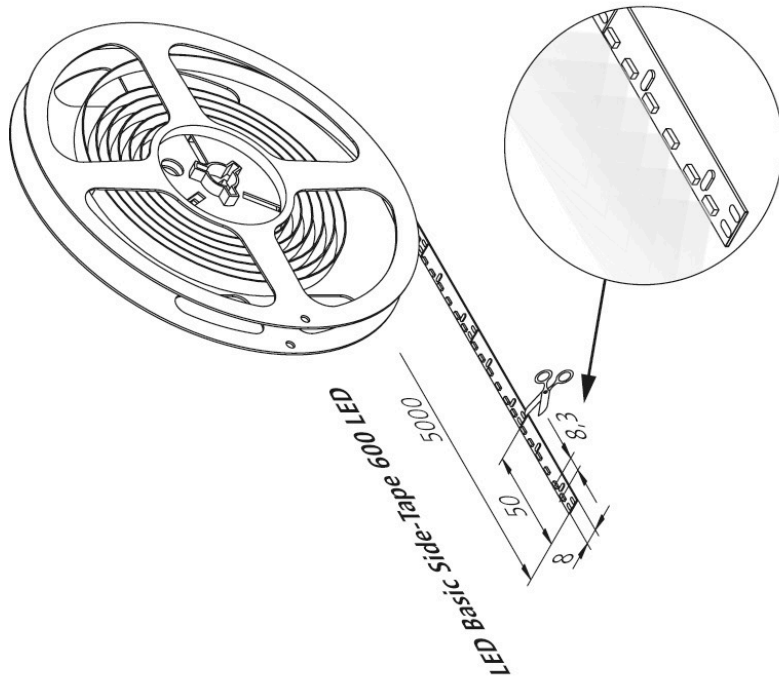

supply cable



connecting cable



connecting clip

