



## LED-2-Link Pixel

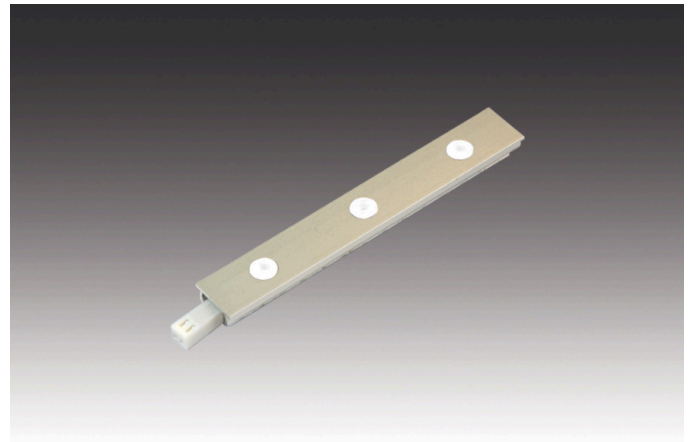

Small, focused recessed showcase spot LED 2 Link Pixel 3x 1,2W nw anodized aluminium

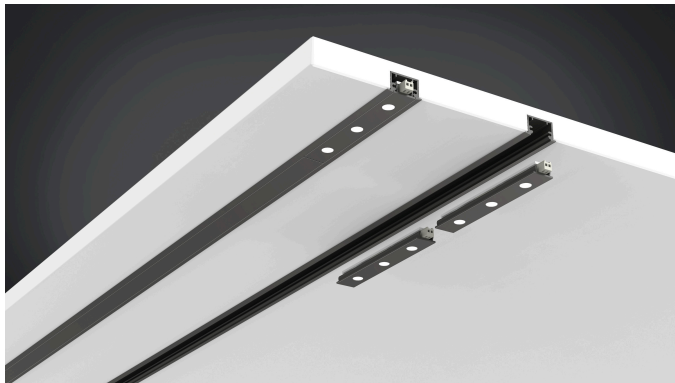

### Description:

combinable LED strip, metal housing, light appearance neutral white approx. 4000K, feed-through wiring with LED 24 plug + LED 24 connector, optional accessories: various recessed and surface-mounted profiles as well as combinable with different kinds of luminaires, Dim-Controller with remote control, 1-10V, DALI, ZigBee, Sonar or WiFi


**Connection:** LED-Trafo DC 24 V  
**Life:** L90/B10 >= 60.000 h  
**Light colour:** 4000 K neutral white  
**Beam angle:** 35°  
**Energy efficiency:** LED 102 lm/W; luminaire: 205 lm (57 lm/W)  
**Colour rendering:** Ra/CRI >= 95  
**Symbols:** CE, MM, UL, IP20, SK III  
**EAN-No.:** 4051268164726  
**Weight:** 0,013 kg

### Special features:

- max. 48W per supply cable

### LED-2-Link Pixel

35°	Ø	ww	nw
0,5m	280	1620 lx	1780 lx
1,0m	560	405 lx	445 lx
1,5m	840	180 lx	198 lx
2,0m	1120	101 lx	111 lx
2,5m	1400	65 lx	71 lx

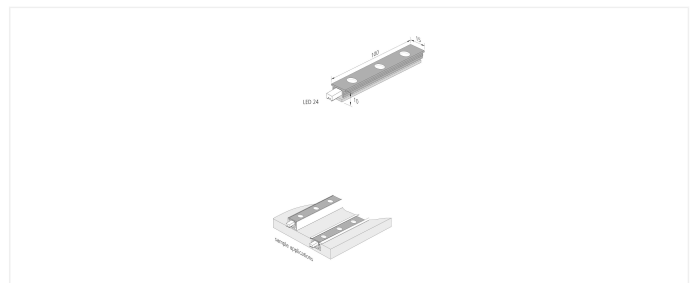

**Order number:**  
61002120103

limited availability

## available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61002120302	LED 2 Link Pixel 3x 1,2W ww black	black	3000 K warm white
61002120102	LED 2 Link Pixel 3x 1,2W ww anodized aluminium	anodized aluminium	3000 K warm white
61002120303	LED 2 Link Pixel 3x 1,2W nw black	black	4000 K neutral white
61002120103	LED 2 Link Pixel 3x 1,2W nw anodized aluminium	anodized aluminium	4000 K neutral white

