


LED-2-Link Flood



Showcase system light panel elements LED-2-Link Flood 10,4W nw 600mm black

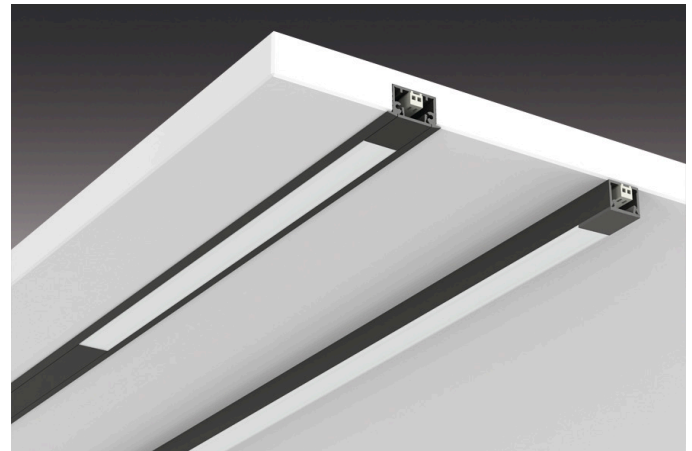


Description:

combinable luminaire with homogeneous planar light, light appearance neutral white approx. 4000K, feed-through wiring with LED 24 plug + LED 24 connector, optional accessories: various recessed and surface-mounted profiles as well as combinable with different kinds of luminaires, Dim-Controller with remote control, 1-10V, DALI, ZigBee, Sonar or WiFi

Connection: LED-Trafo DC 24 V
Life: L90/B10 >= 60.000 h
Light colour: 4000 K neutral white
Beam angle: 120°
Energy efficiency: LED 107 lm/W; luminaire: 935 lm/m (58 lm/W)
Energy efficiency class: G
Colour rendering: Ra/CRI >= 98
Symbols: CE, MM, UL, IP20, SK III
EAN-No.: 4051268165310
Weight: 0,047 kg

Special features:

- no visible luminous spots
- max. 60W per supply cable

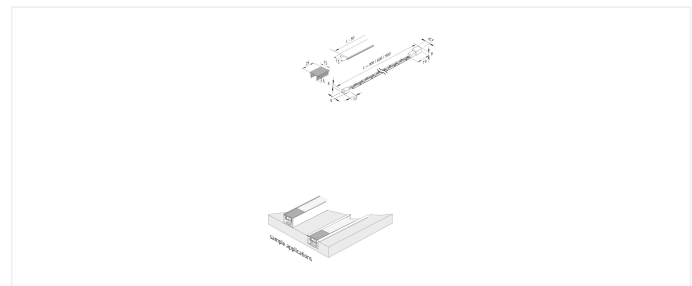

Order number:
61002161303



limited availability



available versions

Choose from the options below. The currently selected one is highlighted in color.

article number	description	colour of housing	light colour
61002160302	LED-2 Link Flood 4,8W ww 300mm black	black	3000 K warm white
61002160102	LED-2-Link Flood 4,8W ww 300mm anodized aluminium	anodized aluminium	3000 K warm white
61002160303	LED-2-Link Flood 4,8W nw 300mm black	black	4000 K neutral white
61002160103	LED-2-Link Flood 4,8W nw 300mm anodized aluminium	anodized aluminium	4000 K neutral white
61002161302	LED-2-Link Flood 10,4W ww 600mm black	black	3000 K warm white
61002161102	LED-2-Link Flood 10,4W ww 600mm anodized aluminium	anodized aluminium	3000 K warm white
61002161303	LED-2-Link Flood 10,4W nw 600mm black	black	4000 K neutral white
61002161103	LED-2-Link Flood 10,4W nw 600mm anodized aluminium	anodized aluminium	4000 K neutral white
61002162302	LED-2-Link Flood 16,1W ww 900mm black	black	3000 K warm white
61002162102	LED-2-Link Flood 16,1W ww 900mm anodized aluminium	anodized aluminium	3000 K warm white
61002162303	LED-2-Link Flood 16,1W nw 900mm black	black	4000 K neutral white
61002162103	LED-2-Link Flood 16,1W nw 900mm anodized aluminium	anodized aluminium	4000 K neutral white

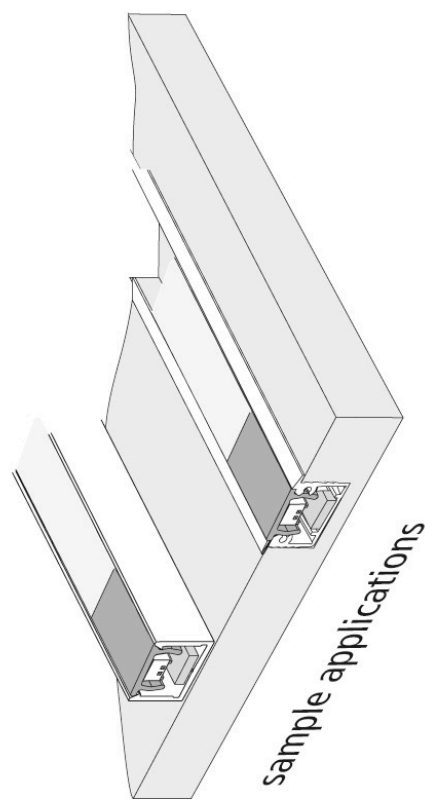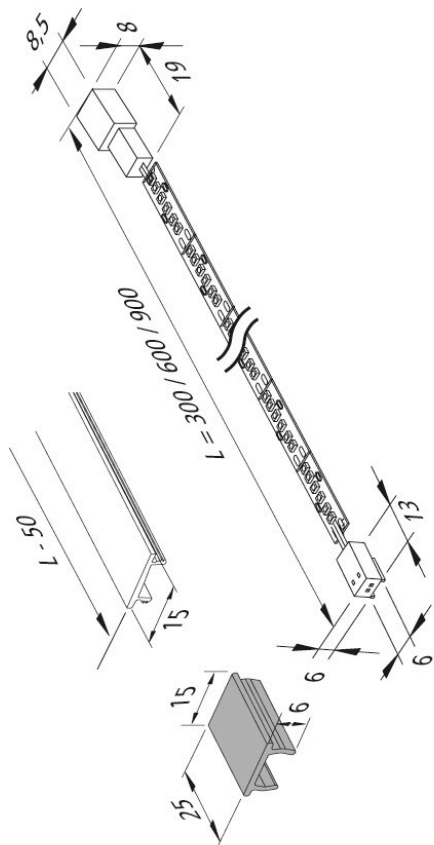

sample applications